
DATA SHEET





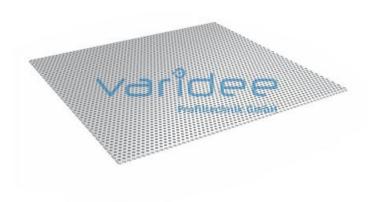

Perforated sheet AI 2 mm bright RV 3/5 (cut)

Reference: FE-LB-AL-2-BL-RV3-5-Z

Thickness: 2.0 mm Material: AIMg3 G22 Surface: bright, not degreased Cut max.: 2470 x 1220 mm Cut: DL-S-FE m = 3.20 kg/m²

Perforated sheets are suitable as a surface element for visually appealing and air-permeable cladding. Various thicknesses and hole diameters are available. A protective film on one side prevents of scratching the perforated sheets.

Industriestraße 31 91171 Greding www.varidee.de info@varidee.de Telefon: +49 84 63 603 63-0 Fax: +49 84 63 603 63-11

