
# DATA SHEET

Varidee Profiltechnik GmbH



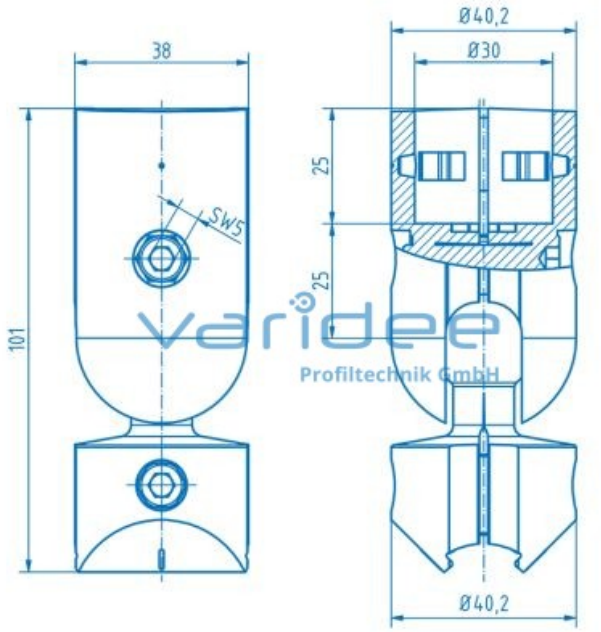


## Ball Joint Fastener D30 Al

Reference: KUV-D30-AL

Consists of:
2 Connector halves ball head, GD-Al, bright
2 Connector halves ball socket, GD-Al, bright
2 Cap screws DIN 912, M6x28, St, galvanized
2 Hexagon nuts DIN 985 (self-locking), St, galvanized
m = 199.0 g

The ball joint fastener acts as a joint. The intended immersion depth of the profile tube in the fastener is 25 mm. The internal ball allows a continuous adjustment range of 180°. This allows struts to be mounted in any spatial arrangement. The assembly-ready ball joint fastener is delivered as a set and includes the necessary mounting set. This makes the fastener immediately ready for service. The tightening torque of the fastening screw is M = 10 Nm. If required the screw points can be closed with additionally orderable cap D30 arched R15, grey.

Industriestraße 31
91171 Greding

**www.varidee.de**
**info@varidee.de**

Telefon: +49 84 63 603 63-0
Fax: +49 84 63 603 63-11

Varidee Profiltechnik GmbH