
## **DATA SHEET**





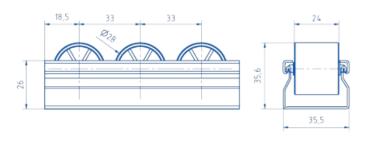

## Roller Conveyor St ESD D30, black (2 meters)

Order number: RB-ST-D30-ESD-S-S2

Consists of: Castor conveyor profile, St, galvanized Castors, PA-ESD, black similar to RAL 9005 Axles, St, galvanized 1 Bar of 2.000 mm each

m = 886,0 g/m

Phone: +49 84 63 603 63-0

The roller conveyor St D30 ESD is a ready to install and light running castor rail D30. The ESD-safe design is intended for production areas with sensitive electronic components. The electrostatic conducting property enables use in the ESD area. The pre-assembled roller conveyor can be cut to the required length. Due to a lot of receptacles, the roller conveyor can be mounted easily and without any further processing to frame constructions made of profile tubes D30. The used steel axles and light-running cylindrical rollers ensure a long service life. The maximum permissible force on a single castor is  $F_{max} = 80 \text{ N}$ .

