
DATA SHEET





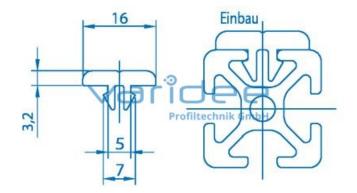

Slide strip 5 ESD, black (2 meters)

Reference: GL-5-ESD-S2

Surface resistivity $< 10^{6}$ Ohm Material: PE-UHMW Color: black Load: $F_{max} = 2 \text{ N/mm}^{2}$ Length: 2000 mm m = 57.0 g/m

The permanently conductive ESD sliding strip is suitable as a stop bumper or glide bar for goods, small parts containers or workpiece carriers. The strips are clipped directly into the profile groove and are self-locking. The conducting material of the sliding strip prevents electrostatic charging. The special feature of the sliding strip is the wear-resistant surface and the very good sliding properties of the material.

Industriestraße 31 91171 Greding www.varidee.de info@varidee.de Telefon: +49 84 63 603 63-0 Fax: +49 84 63 603 63-11

