


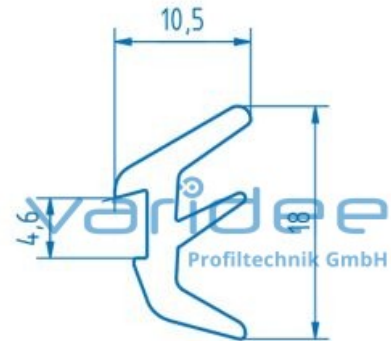

Lip seal 8 2-4 mm, grey (cut)

Reference: DP8-2-4-G-Z

Material: TPE

Color: window gray similar to RAL 7040

c = 2.0 - 4.0 mm

Cut max.: 100 m

Saw Cut Type A

m = 69.5 g/m

Lip seals are used to fix and seal surface elements of different thicknesses in the profile groove. The elastic material is resistant to detergent. For easy installation, it is recommended to moisten them with soapy water before installation. The locking of the sealing profiles in the profile groove is carried out by pressing in.