
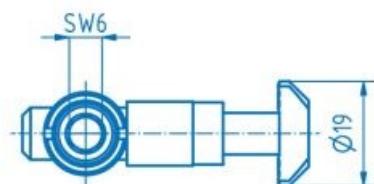


DATA SHEET

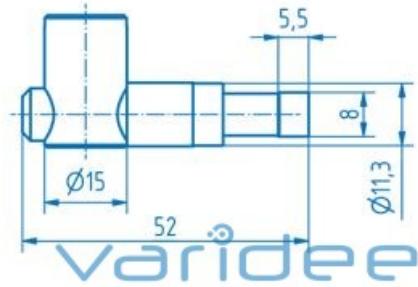

Central connector 8 horizontal

Reference: ZV-8-H

Bushing = 15 mm
Bolt = 8.0 mm with horizontal hammer
Material: St
Surface: galvanized
m = 49.0 g

Central connector 8 St, galvanised are suitable for light, right-angled connections when constructing frame elements with series 8 profiles. The connector offers the advantage that the grooves facing each other remain completely free to accommodate surface elements. A blind hole with D = 15mm must be drilled into the cross profile for connection processing. Furthermore, the core hole must be drilled out to D = 8.2mm at the front. Depending on the required installation position, connectors with vertical or horizontal hammer position are available. Not suitable for heavy-duty or safety-relevant applications!